Dimensions

Potted Pt100 RTD
in a 2-wire configuation

Technical data

General specifications	
Number of pins	3
Mechanical specifications	
Core cross-section	max. 2.5 mm^2
Material	
Color	black
Mass	approx. 5 g
Dimensions	15.1 x 15 x 18 mm (0.6 x 0.6 x 0.7 inch)
Construction type	screw terminal with integrated cold junction compensation , removable
Structure	one-rowed
General information	
Packing unit	1 item(s)

Features

- 3-pin screw terminal
- For KF modules of K-System
- Integrated Cold Junction Compensation
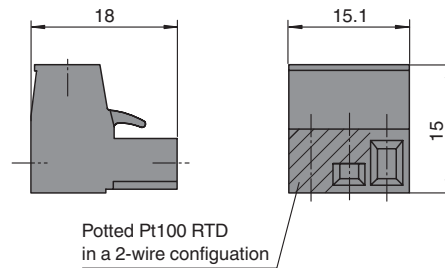- Packaging unit: 1 piece, black

Function

The terminal block is suitable for K-System applications.

The black terminal block is used for connection of field signals as well as the connection of control signals.

This terminal block has an integrated encapsulated Pt100 RTD for cold junction compensation.

The terminal block can be coded with the provided coding pins KF-CP.

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

| Pepperl+Fuchs Group | USA: +1 330 486 0002 | Germany: +49 621 776 2222 | Singapore: +65 6779 9091 |
| www.pepperl-fuchs.com | pa-info@us.pepperl-fuchs.com | pa-info@de.pepperl-fuchs.com | pa-info@sg.pepperl-fuchs.com |

PEPPERL+FUCHS
PROTECTING YOUR PROCESS

1