

Marina enclosures

polyester - IP 66 - IK 10




0 362 85



0 362 86 with plinth Cat.No 0 362 96
internal door Cat.No 0 363 67
and roof Cat.No 0 362 97

Equipment for Marina enclosures

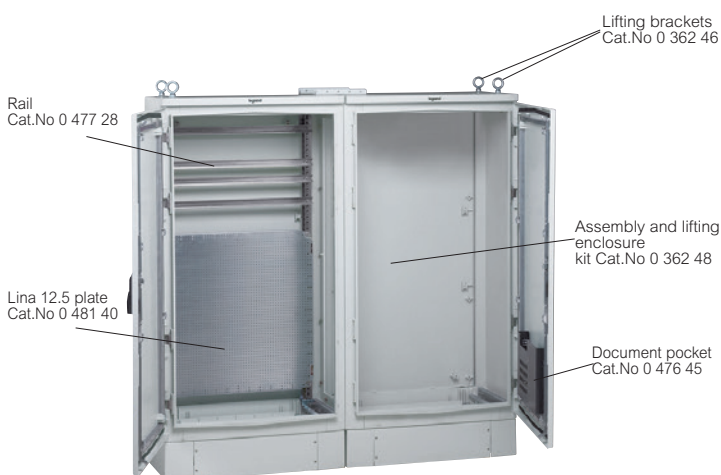

Rail
Cat.No 0 477 28

Lina 12.5 plate
Cat.No 0 481 40

Lifting brackets
Cat.No 0 362 46

Assembly and lifting
enclosure
kit Cat.No 0 362 48

Document pocket
Cat.No 0 476 45

Example of 2 enclosures Cat.No 0 362 85 on plinth
Cat.No 0 362 96, associated and equipped

Technical characteristics p. 270

IP 66 acc. to IEC EN 60529
LCIE n° 60059283-560528
IK 10 acc. to EN 62262 (EN 50102)
Class II (Used to create totally isolated assemblies acc. to EN 60439-1)
Fiberglass reinforced polyester
Self-extinguishing 960°C acc. to IEC EN 60695-2-11
Adapted to corrosive environment
Supplied with fixing kit for plain plates or sectionned uprights
Depth adjustment of equipment
Equipped with low cable entries plate
Reversible door with strand-holder
3 point closing with handle fitted with 1/2 locking latch 2433 A (other key code, please consult us)
Stainless steel hinges and hinges axis

Pack	Cat.Nos	Enclosures RAL 7035	External dimensions (mm) Height x Width x Depth	Corresponding metal enclosures (mm) Height x Width x Depth
1	0 362 85		1460 x 800 x 463	1400 x 800 x 400
1	0 362 86		1660 x 800 x 463	1600 x 800 x 400
1	0 362 87		1860 x 800 x 463	1800 x 800 x 400

Pack	Cat.Nos	Plinth RAL 7035
1	0 362 96	Height 170 mm Front and rear trap door Possibility to overlap 2 plinths For enclosure width 800 x depth 400 mm

Pack	Cat.Nos	Roof RAL 7035
1	0 362 97	For enclosure width 800 x depth 400 mm

Pack	Cat.Nos	Equipment
		Plain plates Galvanized steel. Pre-marked pitch 100 mm Admissible load: 200 kg/m ²
		For enclosures
		Height x Width (mm)
1	0 349 59	1400 x 800
1	0 349 50	1600 x 800
1	0 344 18	1800 x 800
		Net weight (kg)
		27
		30.5
		34
		Lina 12.5 plates Galvanized steel With drilling for fixing equipment without marking Automatic bracket: - Ø6.5 mm for plastic rivet Cat.No 0 366 44 (trunking) - Ø3.3 mm for equipment with screw Cat.No 0 347 45 For installation of Cat. No 0 481 40/43, use Lina 25 sectionned uprights (p. 274) Cat. No 0 364 08 can be fixed directly on the back of the enclosure (1400 mm height enclosures) Admissible load: 150 kg/m ²
		Plates
		Height x Width (mm)
1	0 481 40	800 x 800
1	0 481 43	1000 x 800
1	0 346 08	1400 x 800
		Net weight (kg)
		5.9
		7.6
		14.6
		Lina 25 perforated plates Zinc steel For mounting with sectionned uprights (except plain plate Cat.No 0 346 09) Admissible load: 50 kg/m ²
		Plates
		Height x Width (mm)
1	0 474 90	800 x 800
1	0 474 95	1000 x 800
1	0 346 09	1400 x 800
		Net weight (kg)
		3.9
		5
		6.7
		Internal doors RAL 7035 IP xxB steel. Textured polyester coated steel Double bar lock. Take key barrels and other knockouts (p. 276) Distance between enclosure door and internal door 78 mm Right or left opening, handle included
		For cabinets
		Height x Width (mm)
1	0 363 66	1400 x 800
1	0 363 67	1600 x 800
1	0 363 68	1800 x 800
		Door dim. (mm) Height x Width
		1280 x 675
		1480 x 675
		1680 x 675
		Door usable dim. (mm) Height x Width
		1200 x 580
		1400 x 580
		1600 x 580