


DPX³ 160 and 250 common auxiliaries and accessories



4 210 58

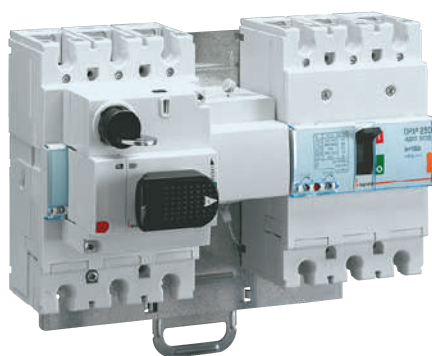

4 210 00



4 210 10



4 210 11



4 210 16



4 210 22

Pack	Cat.Nos	Fixing plates for transfer switches
1	4 210 58	Plate for mounting and interlocking of 2 DPX ³ For 2 DPX ³ 160 or 2 DPX ³ 250 or 1 DPX ³ 160 and 1 DPX ³ 250
1	4 210 59	For fixed version For plug-in and draw-out version
Rotary handles		
Direct on DPX		
1	4 210 00	Standard handle for thermal magnetic DPX ³ without earth leakage module
1	4 210 01	Standard handle for electronic DPX ³ and/or with earth leakage module
1	4 210 02	Handle for emergency use for thermal magnetic DPX ³ without earth leakage module
1	4 210 03	Handle for emergency use for electronic DPX ³ and/or with earth leakage module
Vari-depth handles		
For all version of DPX ³		
1	4 210 04	Standard handle
1	4 210 05	Handle for emergency use
Locking accessories		
1	4 228 00	Key barrel and Ronis key EL43525 for direct handle
1	4 228 01	Key barrel and Ronis key EL43363 for direct handle
1	4 228 02	Key barrel and Ronis key EL43525 for vari-depth handle
1	4 228 03	Key barrel and Ronis key EL43363 for vari-depth handle
1	4 210 06	Key barrel and flat key N° ABA90GEL6149 for direct handle
1	4 210 07	Key barrel and star key N° HBA90GPS6149 for direct handle
1	4 210 08	Key barrel and flat key N° ABA90GEL6149 for vari-depth handle
1	4 210 09	Key barrel and star key N° HBA90GPS6149 for vari-depth handle
Motor-driven handles		
Motor operators 24 to 230 V~ / =		
1	4 210 60	Side motor operator
1	4 210 61	Front motor operator
Locking accessories		
1	4 210 62	Key barrel and flat key N° ABA90GEL6149 for front motor operator
1	4 210 63	Key barrel and star key N° HBA90GPS6149 for front motor operator
1	4 210 64	Padlock for front motor operator
1	4 210 65	Key barrel and flat key N° ABA90GEL6149 for side motor operator
1	4 210 66	Key barrel and star key N° HBA90GPS6149 for side motor operator
1	4 210 67	Padlock for side motor operator

Pack	Cat.Nos	Auxiliary contact or fault signal	
1	4 210 10	1 N/C + 1 N/O auxiliary contact for rotary handles	
1	4 210 11	Auxiliary contact or fault signalling contact	
1	4 210 48	Signalling contact plugged-in / drawn-out (for DPX ³ plug-in version)	
Shunt releases			
Allow remote tripping of a DPX ³ /DPX ³ -I 160 and 250			
1	4 210 12	12 V~ / =	
1	4 210 13	24 V~ / =	
1	4 210 14	48 V~ / =	
1	4 210 15	110-130 V~	
1	4 210 16	200-277 V~	
1	4 210 17	380-480 V~	
Undervoltage releases			
Allow remote tripping of a DPX ³ /DPX ³ -I 160 and 250			
1	4 210 18	12 V~ / =	
1	4 210 19	24 V~ / =	
1	4 210 20	48 V~ / =	
1	4 210 21	110-130 V~ / =	
1	4 210 22	200-240 V~	
1	4 210 23	277 V~	
1	4 210 24	380-415 V~	
1	4 210 25	440-480 V~	
Time lag (800 ms) undervoltage release			
Allow remote tripping of a DPX ³ /DPX ³ -I 160 and 250 Prevents false tripping in the event of power supply microbreaks			
Time-lag modules			
1	0 261 90	230 V~	Number of modules 3
1	0 261 91	400 V~	3
Release			
To be equipped with a time-lag module Cat.Nos 0 261 90/91			
1	4 210 98	For DPX ³ /DPX ³ -I 160 and 250	
Locking accessory			
1	4 210 49	Padlock for locking in "open" position	